



Can Stack Captive Linear Stepper Motor

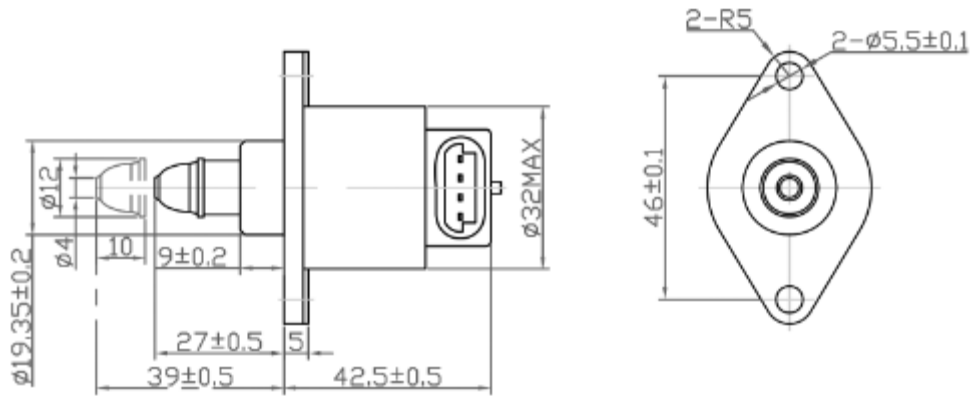

Dimensions unit=mm



STEP	A	B	\bar{A}	\bar{B}
1	-	-	-	-
2	-	-	-	-
3	-	-	-	-
4	-	-	-	-
5	-	-	-	-

32YCZ42A12B-A13-F

Electrical Data		Condition
1	Rated Voltage	12VDC
2	Resistance per Phase, $\pm 10\%$	53 Ω
3	Inductance per Phase, $\pm 20\%$	23.5 mH
4	Rated Current per Phase	0.23 A
5	Linear Travel Step	0.042 mm/Step
6	Max Force	35N
7	Maximum travel	13.2 mm
8	Step Angle	15°
9	Ambient Temperature Range	-40 to +125°C
10	Insulation Resistance	100 M Ω
11	Protection Rate	IP54
12	Weight	120g
13	Leadwire	